



## Propane Tank Level Monitor

### General Description

The Wireless Propane Tank Level Monitor allows a user to remotely monitor the level of a propane tank by simply plugging in the R3D<sup>®</sup> (Remote ready) sensor into a pre-installed R3D tank gauge. As the propane level is decreased, the reading produced decreases as well. The monitor converts the reading into a percentage of propane remaining in the tank and transmits that percentage wirelessly to its connected gateway. The percentage depends on the configuration of the tank and the R3D gauge pulling an accurate level of propane inside.

**Important:** Tank gauges that are not R3D ready can be upgraded with an R3D gauge from one of these vendors: See the chart on page 3.

**Warning:** If you do not have a dial that is R3D compatible, do NOT attempt to change the dial yourself. Please contact your propane supplier and ask them for a replacement dial that supports the R3D standard. The float gauge inside the tank does not need to be replaced, just the plastic dial that reports the propane level inside the tank. (Compare your dial to those in the following and verify which one is installed on your tank. If R3D ready, please proceed.)

### Principle of Operation

The Propane Tank Level Monitor uses the Level Monitor to measure volumetric percentage of propane in a contained environment. A magnet attached to a buoyant device will be placed atop propane in a container with the Level Monitor placed at a reasonably close distance. The Level Monitor produces a voltage proportional to the sensed magnetic field, so as the propane level is decreased, the voltage produced is as well. This monitor converts the sensed voltage into a percentage based on the volume of the container. This monitor is based on the assumption that the container holding the propane is uniform in width such that each unit of height the propane gas is depleted is of equal volume

If the propane level has fallen below 8% then the sensor portal displays “Empty”.

If the propane level is above 80% then the sensor portal reports “Full”.

### Example Interfacing

- Propane level monitoring


### Features of Wireless Sensors


- Wireless range of 1,200+ feet through 12+ walls \*
- Frequency-Hopping Spread Spectrum (FHSS)
- Best in class interference immunity
- Best in class power management for longer battery life \*\*
- Encrypt-RF<sup>®</sup> Security (Diffie-Hellman Key Exchange + AES-128 CBC for sensor data messages)
- All sensors now have up to 3200 readings:
  - 10-minute heartbeats = 22 days
  - 2-hour heartbeats = 266 days
- Over-the-air updates (future proof)
- Use ioX-Connect wireless sensor monitoring and notification system to configure sensors, view data and set alerts via SMS text and email

\*Actual range may vary depending on environment.

\*\*Battery life is determined by sensor reporting frequency and other variables. Other power options are also available.

### Wireless Range Comparison

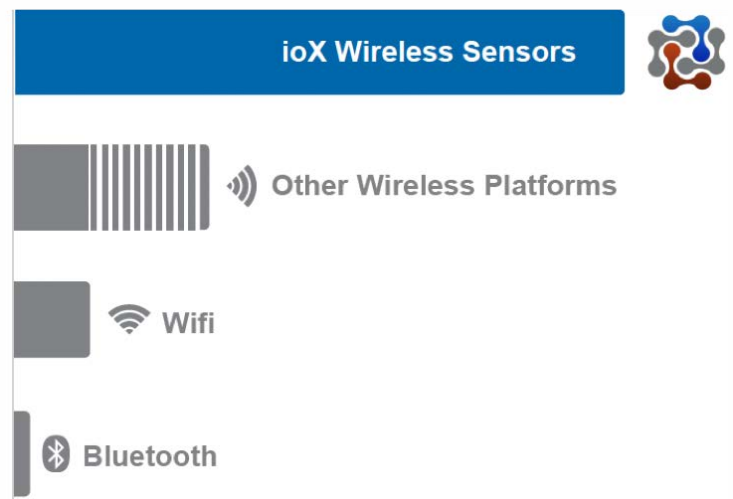

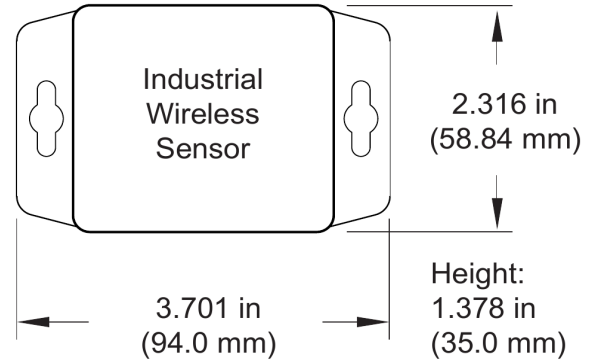

## Industrial Wireless Propane Tank Monitor | Technical Specifications

Supply voltage	2.0–3.8 VDC (3.0–3.8 VDC using power supply)																								
Current consumption	0.2 $\mu$ A (sleep mode), 0.7 $\mu$ A (RTC sleep), 570 $\mu$ A (MCU idle), 2.5 mA (MCU active), 5.5 mA (radio RX mode), 22.6 mA (radio TX mode)																								
Operating temperature range (board circuitry and battery)	-40°C to +85°C (-40°F to +185°F)																								
Included battery	Max temperature range	-40° to +85°C (-40° to +185°F)																							
	Capacity	1500 mAh																							
Optional solar feature	Solar panel	5VDC/30mA (53mm x 30mm)																							
	Charging temperature range	0° to 45°C (32° to 113°F)																							
	Max temperature range	-20° to 60°C (-4° to 140°F)																							
	Included rechargeable battery	600 mAh/>2000 charge cycles (80% of initial capacity)																							
Solar efficiency	Optimized for high and low-light operation *																								
Integrated memory	Up to 3200 sensor messages																								
Wireless range	1,200+ ft non-line-of-sight																								
Lead Length	6 feet																								
Security	Encrypt-RF® (256-bit key exchange and AES-128 CTR)																								
Weight	4.7 ounces																								
Enclosure rating	NEMA 1, 2, 4, 4x, 12 and 13 rated, sealed and weather proof																								
Voltage Conversion Table	<p>Unsupported Table</p> <table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Volume Content (%)</th> <th style="text-align: center;">Voltage Produced (V)</th> </tr> </thead> <tbody> <tr><td style="text-align: center;">Empty</td><td style="text-align: center;">&lt;0.3</td></tr> <tr><td style="text-align: center;">8</td><td style="text-align: center;">0.3</td></tr> <tr><td style="text-align: center;">10</td><td style="text-align: center;">0.6</td></tr> <tr><td style="text-align: center;">20</td><td style="text-align: center;">1.1</td></tr> <tr><td style="text-align: center;">30</td><td style="text-align: center;">1.5</td></tr> <tr><td style="text-align: center;">40</td><td style="text-align: center;">2</td></tr> <tr><td style="text-align: center;">50</td><td style="text-align: center;">2.5</td></tr> <tr><td style="text-align: center;">60</td><td style="text-align: center;">3.1</td></tr> <tr><td style="text-align: center;">70</td><td style="text-align: center;">3.6</td></tr> <tr><td style="text-align: center;">80</td><td style="text-align: center;">4</td></tr> <tr><td style="text-align: center;">Full</td><td style="text-align: center;">&gt;4</td></tr> </tbody> </table>	Volume Content (%)	Voltage Produced (V)	Empty	<0.3	8	0.3	10	0.6	20	1.1	30	1.5	40	2	50	2.5	60	3.1	70	3.6	80	4	Full	>4
Volume Content (%)	Voltage Produced (V)																								
Empty	<0.3																								
8	0.3																								
10	0.6																								
20	1.1																								
30	1.5																								
40	2																								
50	2.5																								
60	3.1																								
70	3.6																								
80	4																								
Full	>4																								
UL rating	UL Listed to UL508-4x specifications (File E194432)																								
Certifications	<div style="display: flex; align-items: center; gap: 10px;"> </div> <p>900 MHz product; FCC ID: ZTL-G2SC1 and IC: 9794A-G2SC1. 868 and 433 MHz product tested and found to comply with: EN 300 220-2 V3.1.1 (2017-02), EN 300 220-2 V3.1.1 (2017-02) and EN 60950</p>																								

\* Light present 25% of day yields 125% of operating power to support 10-minute heartbeats.

## Industrial Grade Sensors | Type 1, 2, 4, 4X, 12 and 13 NEMA Rated Enclosure

Industrial sensors are enclosed in reliable, weatherproof NEMA-rated enclosures. Our NEMA-rated enclosures are constructed for both indoor or outdoor use and protect the sensor circuitry against the ingress of solid foreign objects like dust as well as the damaging effects of water (rain, sleet, snow, splashing water, and hose-directed water).

- Safe from falling dirt
- Protects against wind-blown dust
- Protects against rain, sleet, snow, splashing water, and hose-directed water
- Increased level of corrosion resistance
- Will remain undamaged by ice formation on the enclosure

### R3D Gauge Information

The Propane Level Monitor supports both Jr. and Sr. R3D Gauges. This level monitor does not support anything outside of this specification.



R3D LP Dial Sr. Tab



R3D LP Dial Jr. Tab

Style	Tank
Jr.	Horizontal
Sr.	
Snap-On	
Jr.	Vertical DOT
Jr.	Below Ground



**Warning:** If you do not have a dial that is R3D compatible, do NOT attempt to change the dial yourself. Please contact your propane supplier and ask them for a replacement dial that supports the R3D standard. The float gauge inside the tank does not need to be replaced, just the plastic dial that reports the propane level inside the tank. (Compare your dial to those in the following and verify which one is installed on your tank. If R3D ready, please proceed.)

For more information about our products or to place an order, please contact our sales department at [sales@iox-connect.com](mailto:sales@iox-connect.com)

Visit us on the web at [www.iox-connect.com](http://www.iox-connect.com)



ioX-Connect is an EAMS Technologies Inc brand.  
Orlando, FL 32746  
[sales@iox-connect.com](mailto:sales@iox-connect.com)